


Safety & Installation Instructions

v2.1 -03.24

These instructions are provided for your safety in order to prevent the risk of Fire, Electric shock or Injury. It is vitally important that they are read in their entirety before installing your fitting. Please retain for future reference.

1. If you are in any doubt consult a qualified electrician as to the installation of the fitting. Install in accordance with current IEE wiring regulations. It is recommended that this fitting is installed by a qualified electrician.
2. Ensure that the electrical supply is OFF. Disconnect the electrical supply at the fuse-board.
3. If removing an existing fitting first, note all wiring connections: record which of the house wires is connected to the live, neutral and earth terminals.
4. Carefully identify where the supply cable is (and check there are no other cables in the area) to avoid damage to concealed wiring during installation.
5. Position the light where desired ensuring that there is suitable support adjacent to where you will connect to the house supply and mark position of fixing holes, before drilling appropriate holes as below.
 - a. Brick or masonry: Drill holes into which the wall plugs tightly fit, then insert wall plugs.
 - b. Wood: No hole necessary (unless small pilot hole required), screws can be screwed directly into the timber.
 - c. Plaster/Cavity: Special cavity wall fittings are required, rather than provided fixings. These are widely available from good hardware or DIY store and should come with their own instructions that must be followed. It may be easier to relocate the fitting so that you screw directly into a timber joist or beam.
7. Once the desired drop has been determined, adjust the flex length accordingly. Consult an electrician if in any doubt.
 - Use wire cutters to cut flex at desired length and then remove 60mm of the cotton braid and outer insulation (making sure no damage occurs to the interior cables). Apply electrical tape around the end of the cotton braid to prevent fraying.
 - Remove 11mm of insulation from the conductors, ready to be wired into a connector block.
8. Support the fitting so that no strain is applied to the wiring when making the electrical connections. If necessary get a colleague to help.
9. Electrical connection: this light fitting is earthed. Make connections using the connector block, following the diagram below.

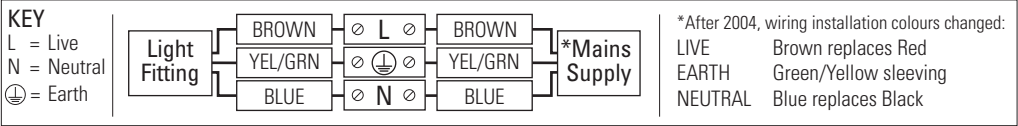

10. Double check all the connections are secure and that no loose strands of wire are left out of the connectors.
11. Check that no wires are trapped behind or within the fitting and complete the installation, see hanging instructions inside.
12. Fit the correct type and wattage of lamp (or less). Be careful not to overtighten the lamp.
13. Switch on at the fuse-board. Your light fitting is now ready for use.

Other Important Information

Switch off at mains before changing lamp(s). Never fit a lamp of greater wattage than recommended. Ensure children do not play with the light fitting. Dispose of old lamps carefully. Never leave a fitting without a lamp in position (or someone can accidentally touch the contacts). Adjust fitting only when power to the fitting is off and has been left to cool. If the external flexible cord or cable of this luminaire is damaged, it shall exclusively be replaced by the manufacturer or his service agent, or similar qualified person, in order to avoid a hazard. For use in a dry, indoor environment only. Ensure the fitting does not come into contact with any liquids.

Cleaning and Maintenance

Bone china can be cleaned by hand, using a soft damp cloth with a diluted mild detergent (nonabrasive) if necessary. Switch off power to the fitting before cleaning. Spare parts are available for these products; please contact us using the information provided below.


Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes. All products are hand-assembled in Oxfordshire from high quality components, produced in the UK.

ORIGINALBTC.COM
+44 (0)1993 882 251
UNIT 21 / 22 AVENUE ONE, STATION LANE, WITNEY, OX28 4XZ, ENGLAND




Christie Pendant Lights

Instruction Manual

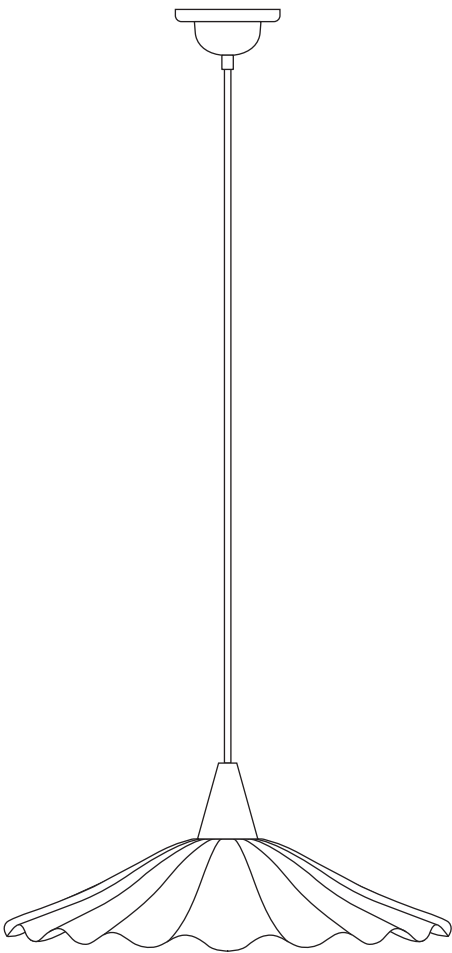

Christie
FP575N

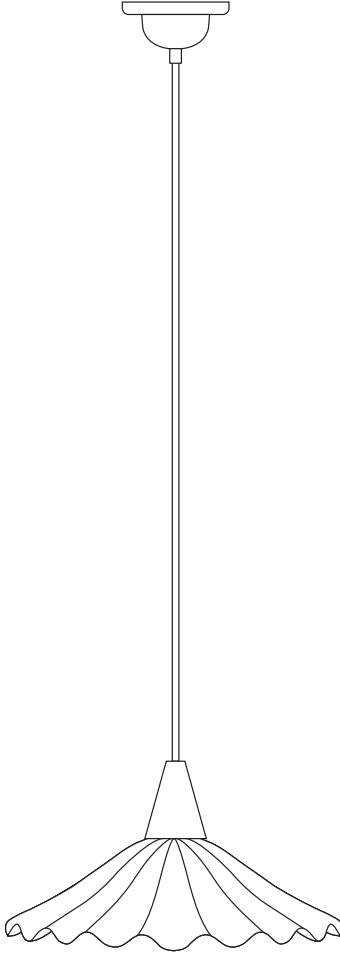

Christie 36
FP577N




ORIGINAL BTC
BRITISH LIGHTING MANUFACTURERS
LONDON • NEW YORK • PARIS




Christie Pendant Lights

| 230V AC 50Hz | IP20 |

FP575N Christie Pendant, Sand & Taupe Braided Cable
FP577N Christie 36 Pendant, Sand & Taupe Braided Cable

LAMP GUIDANCE					
BASE	SHAPE		TYPE*		WATTAGE**
 E27	 GLS	 BALL	INCANDESCENT	✗	N/A
			CFL	✗	N/A
			ECO-HALOGEN	✗	N/A
			LED	✓	18W
<p>* Warm white (2700k) low energy lamps recommended.</p> <p>** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used.</p>					

Contents

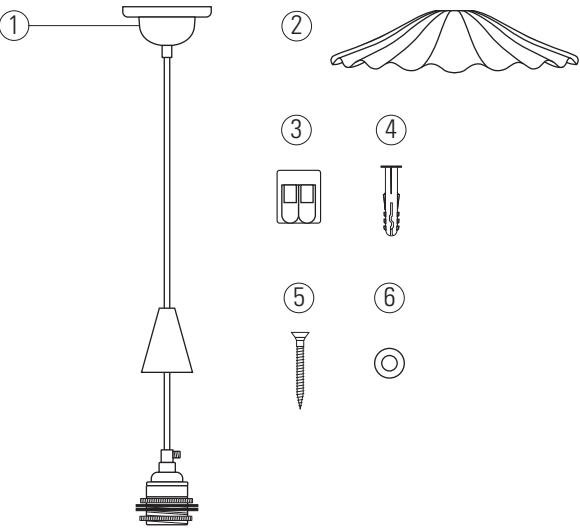


Contents

- 1 Ceiling rose & lampholder assembly
- 2 Shade
- 3 Connector blocks (x3)
- 4 Rawl plugs (x2)
- 5 Fixing screws (x2)
- 6 Nylon washers (x2)


Tools Required

- Cross head screwdriver
- Drill (if holes are required)

Main Supply Cable Preparation

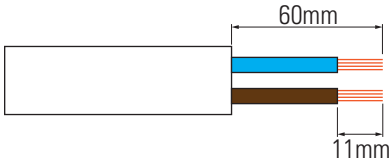


Please prepare the supply cable as shown. Note the maximum conductor size 4mm².

**CAUTION** THIS PRODUCT IS MADE FROM FINE BONE CHINA. EXCESSIVE FORCE USED DURING INSTALLATION OR OPERATION CAN CAUSE DAMAGES OR BREAKAGES.

PLEASE READ THE INSTRUCTIONS ON THE REVERSE BEFORE YOU BEGIN INSTALLING YOUR LIGHT

Installation Instructions

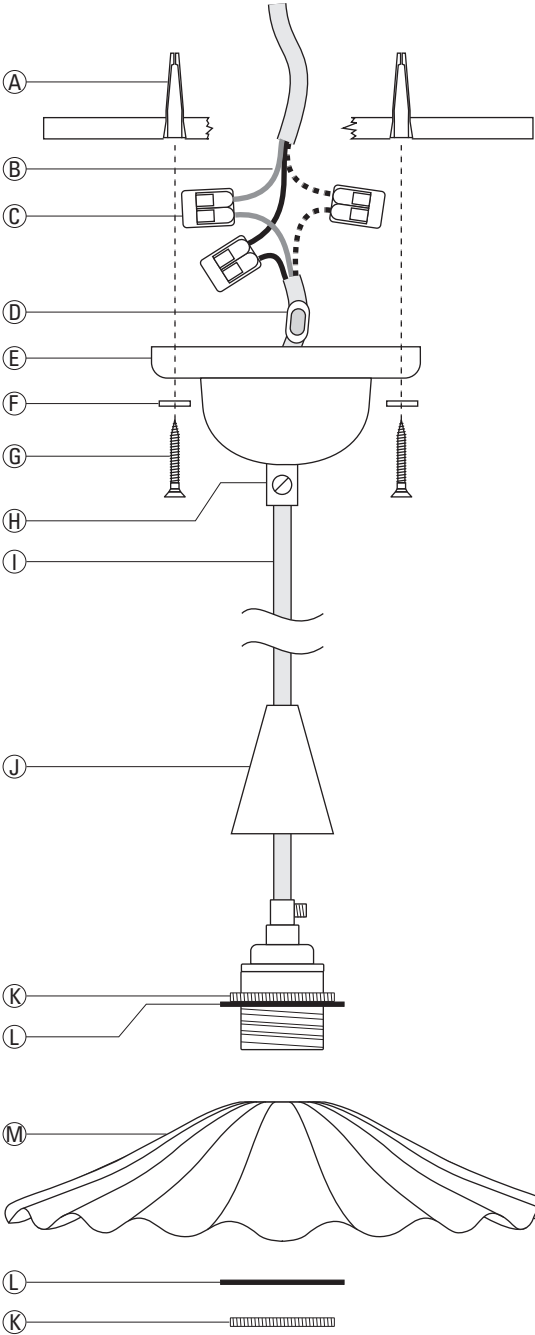

- Mark & drill suitable fixing holes in the ceiling, referring to points 1 to 6 on the back page.
- Determine the desired drop of the fitting and adjust flex (I) length as necessary - see point 7 on the back page. Ensure the cable is fed through both holes of the 2-hole cord grip (D).
- Make the connections to the mains supply using the connector blocks (C) provided. Refer to points 8 to 10 on the back page.
- Secure the ceiling rose (E) in place using the fixing screws (G) provided - taking care to ensure the washers (F) are in place to avoid cracking the ceramic. **DO NOT USE POWER TOOLS; YOU WILL BREAK THE CEILING ROSE.** Tighten the grub screw on the cord grip (H) - do not over tighten, as this can damage the cable.
- Lift the cone (J) to present the lampholder. The shade (M) is sandwiched above and below by a rubber gasket (L) and metal shade ring (K). The rubber gaskets should be between the ceramic shade and metal shade rings.

Key	
A	Rawl plug
B	Main supply
C	Connector block
D	2-Hole cord grip
E	Ceiling rose
F	Nylon washer
G	Fixing screw
H	Grub screw cord grip
I	Luminaire flex
J	Cone
K	Metal shade ring
L	Rubber gasket
M	Shade