

- ENG WARNING – RISK OF FIRE AND ELECTRIC SHOCK. THIS PRODUCT IS BEST INSTALLED BY A QUALIFIED ELECTRICIAN.  
INSTALL IN ACCORDANCE WITH CURRENT NEC WIRING REGULATIONS.  
SUITABLE FOR DRY LOCATIONS ONLY  
THE FITTING MUST BE GROUNDED. TURN OFF POWER AT THE MAIN FUSE BEFORE COMMENCING INSTALLATION.
- FR ATTENTION – RISQUE D'INCENDIE, RISQUE DE CHOC.  
CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.  
POUR EMPLACEMENTS SECS SEULEMENT  
L'APPAREIL DOIT ÊTRE MIS À LA TERRE. COUPEZ LE FUSIBLE PRINCIPAL AVANT DE COMMENCER L'INSTALLATION.
1. If you are in any doubt consult a qualified electrician as to the installation of the fitting. Install in accordance with current NEC wiring regulations. It is recommended that this fitting is installed by a qualified electrician.

2. Ensure that the electrical supply is OFF. Disconnect the electrical supply at the fuse-board.

3. If removing an existing fitting first, note all wiring connections: record which of the house wires is connected to the live, neutral and earth terminals.


4. Carefully identify where the supply cable is (and check there are no other cables in the area) to avoid damage to concealed wiring during installation.

5. Position the light where desired ensuring that there is access to a suitable junction box for the fixture.

6. Using your existing junction box, use a screwdriver to open the junction box. Keep the two existing screws. This fitting should be installed on a 4" junction box (not supplied).

7. Support the fitting so that no strain is applied to the wiring when making the electrical connections. If necessary get a colleague to help.

8. Electrical connection: this light fitting must be grounded. In your junction box there should be two supply and one ground wire. Connect the power supply (live) Black wire to the Black conductor on the lamp cord, neutral White wire to the White conductor on the lamp cord and ground wire (normally green & yellow or bare copper) to the green/yellow wire.

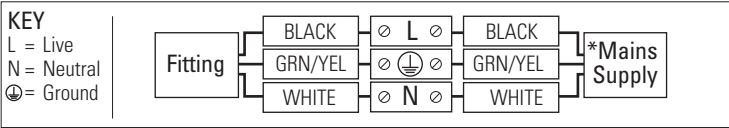

9. Double check all the connections are secure and that no loose strands of wire are left out of the connectors, then fit all the wires and connections back into the junction box.
10. Check that no wires are trapped behind or within the fitting and complete the installation, referring to the installation diagram inside.
11. Fit the correct type and wattage of lamp (or less). Be careful not to overtighten the lamp.
12. Switch on at the fuse-board. Your light fitting is now ready for use.

Other Important Information


Switch off at mains before changing lamp(s). Never fit a lamp of greater wattage than recommended. Ensure children do not play with the light fitting. Dispose of old lamps carefully. Never leave a fitting without a lamp in position (or someone can accidentally touch the contacts). Adjust fitting only when power to the fitting is off and has been left to cool. If the electrical flex or electrical components become damaged at any point, power to the fitting should be disconnected immediately and not operated until the damaged parts are fixed/replaced. For use in dry, indoor environment only. Ensure the fitting does not come into contact with any liquids.

Cleaning and Maintenance

Metal finishes should only be cleaned with a soft, dry cloth. Do not use polishes or abrasives. Bone china can be cleaned by hand, using a soft damp cloth with a diluted mild detergent (nonabrasive) if necessary. Switch off power to the fitting before cleaning. Spare parts are available for this product, please contact us on the details below.

Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes. All products are hand-assembled in Oxford from high quality components, produced in the UK.

ORIGINALBTC.COM  
+44 (0)1993 882 251  
UNIT 21 / 22 AVENUE ONE, STATION LANE, WITNEY, OX28 4XZ, ENGLAND

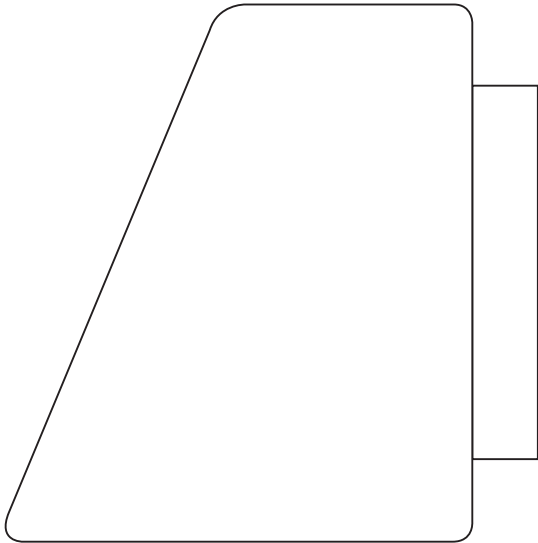




Coach Wall Light

120V ac 60Hz | IP20

US-FW494 Coach Wall Light

Inspired by the coach lights on the Indian railways and made out of our translucent bone china, the coach light provides beautiful ambient lighting.

LAMP GUIDANCE Hector Medium				
BASE	SHAPE		TYPE*	WATTAGE**
 E26	 A	 BALL	INCANDESCENT	40W MAX
			CFL	11W
			ECO-HALOGEN	n/a
			LED	7W
* Warm white (2700k) low energy lamps recommended.				
** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used.				

PLEASE READ THE INSTRUCTIONS ON THE REVERSE BEFORE YOU BEGIN INSTALLING YOUR LIGHT

- A

Fixing screws

B

Coach Light Back Box

C

Lamp cord

D

\*Junction box screws

E

\*Junction box cover

F

\*Wire Nuts

G

Supply cable

H

\*Junction box

I

Rawl plugs

J


Bone china shade



K

Shade ring

L

E26 Lampholder
- \*Not supplied
- Fig.1



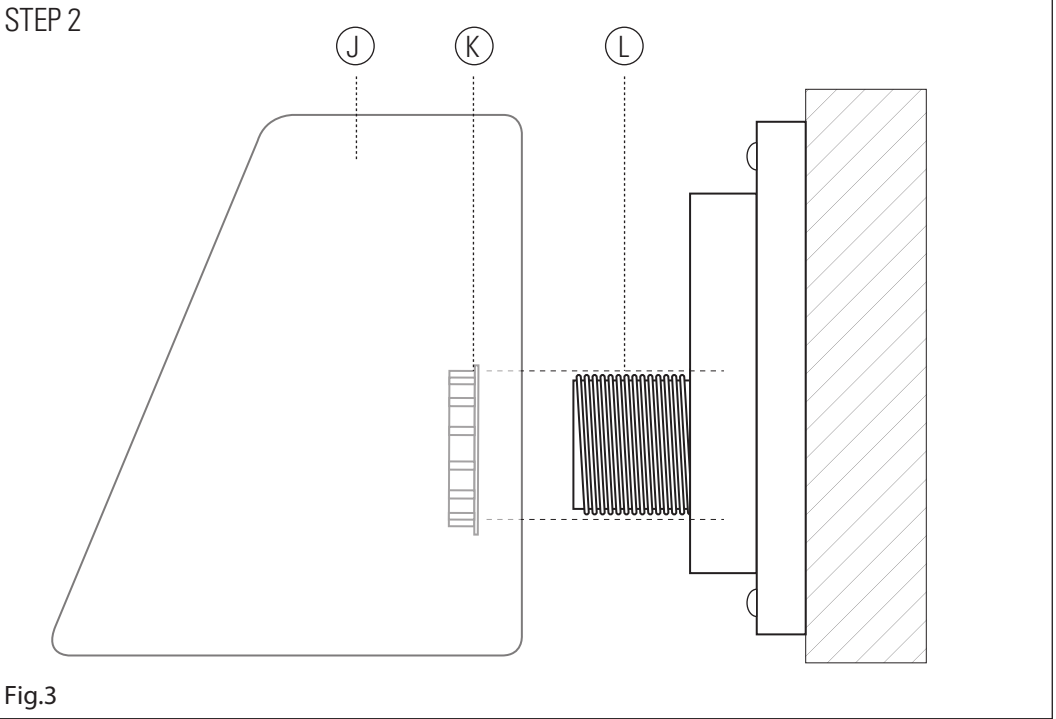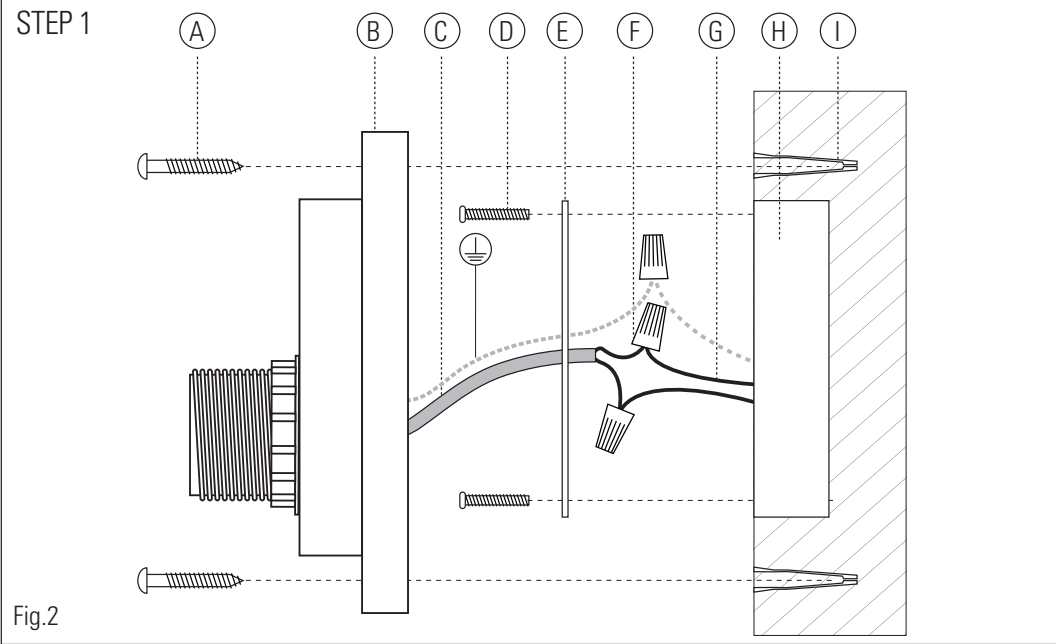

Installation and Assembly Instructions

- STEP 1
- Determine appropriate position to install the fitting, before preparing the wall for installing the back box and making electrical connection (see points 1 - 9 in the instructions overleaf).
- STEP 2
- Remove shade ring (K) from lampholder (L), before placing shade over the backplate, so that the lampholder protrudes through the hole in the rear of the shade (J).
  - Position the shade so it is straight, before securing the shade to the back box (B) using shade ring (K), screwing onto lampholder (L) firmly, but without force.  
CAUTION: the shade is produced from fine bone china and could be damaged if the shade ring is overtightened, or excessive force used.
  - Once light fitting has been installed, insert the correct lamp. We recommend using low energy (CFL or LED) lamps. Do not overtighten lamp.