



# BLOSSOM Linear Light (Remote Driver)



75mm

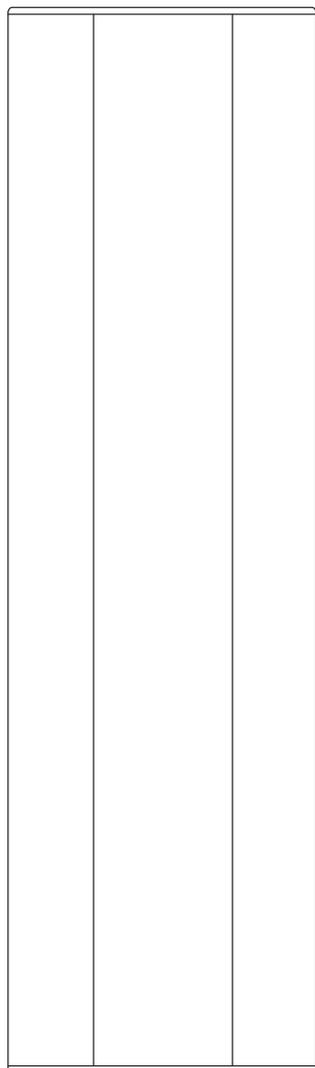

75mm



55mm

280mm

## Specifications

PRODUCT CODE: FW709N

MAX WATTAGE: 2.5W

VOLTAGE: 12V (DC)

BULB TYPE: LED TUBE (SUPPLIED)

IP RATING: IP44

MATERIAL(S): BONE CHINA,  
POWDER COATED STEEL

AVAILABLE FINISH: BONE CHINA

Supplied with integral LED and driver (for remote installation up to 10 meters from the fitting\*)

Fitting is dimmable and is supplied with a TRIAC dimming leading edge driver \*\*


Warm white tone LED (2700K)

\*Assuming minimum cable gauge is 1.5mm (16AWG)

\*\*Dimming performance may vary between manufacturers, check minimum load and compatibility against dimmer specification.

**IMPORTANT:**  
LOW VOLTAGE LED FITTING  
CONNECTION TO REMOTE DRIVER (SUPPLIED)  
REQUIRED FOR MAINS INSTALLATION

# BLOSSOM Linear Light (Backplate/ Mount)

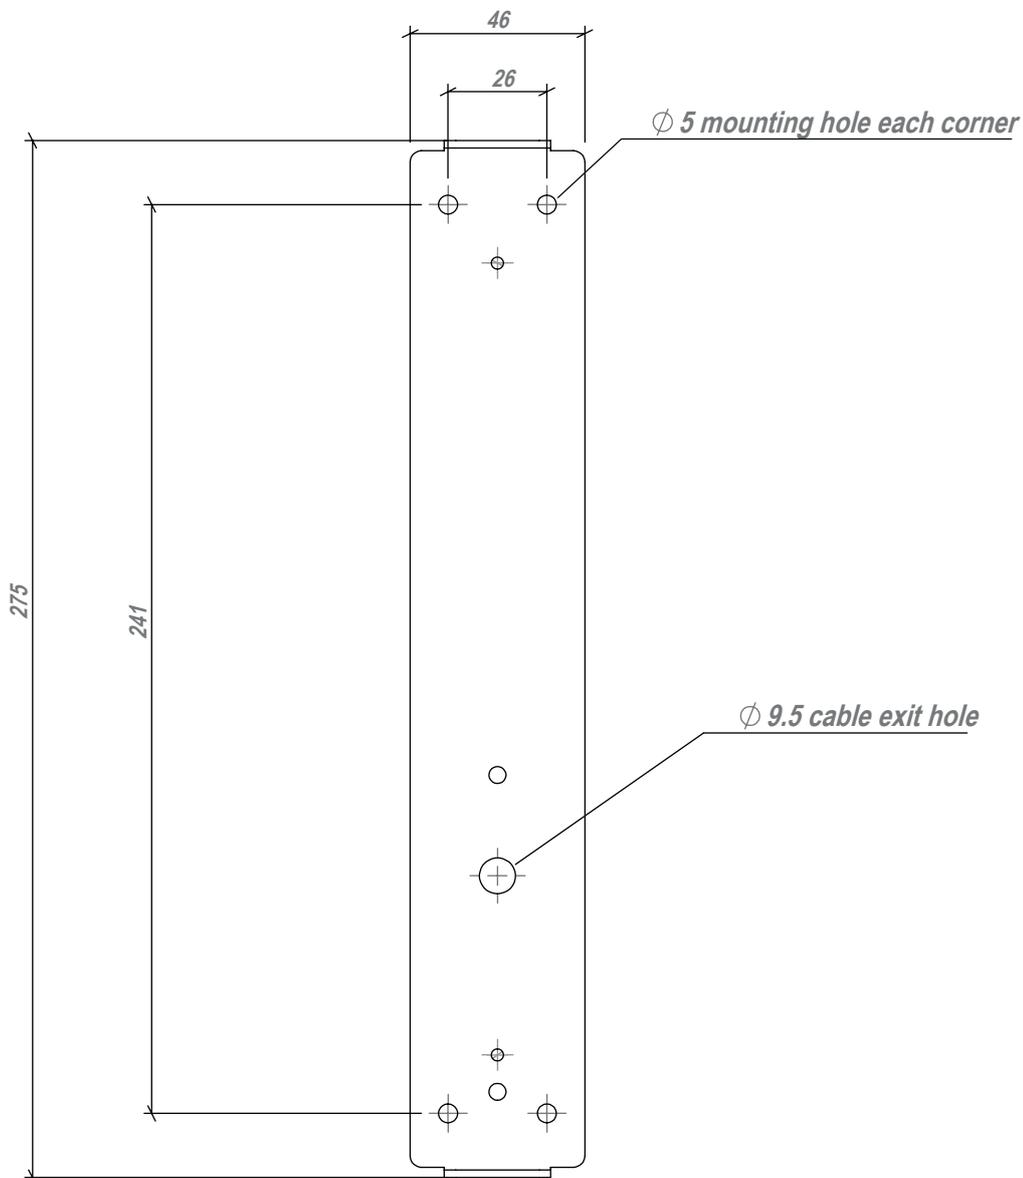

Backplates can be rotated 180 degrees- to allow cable exit to be positioned at top if required.

Stated dimensions are for reference purposes only. Due to manufacturing tolerances, the actual dimensions of each product may differ to those stated.